



TLK - 300 (TA300)

RUGGEDIZED TFT-LCD MONITOR

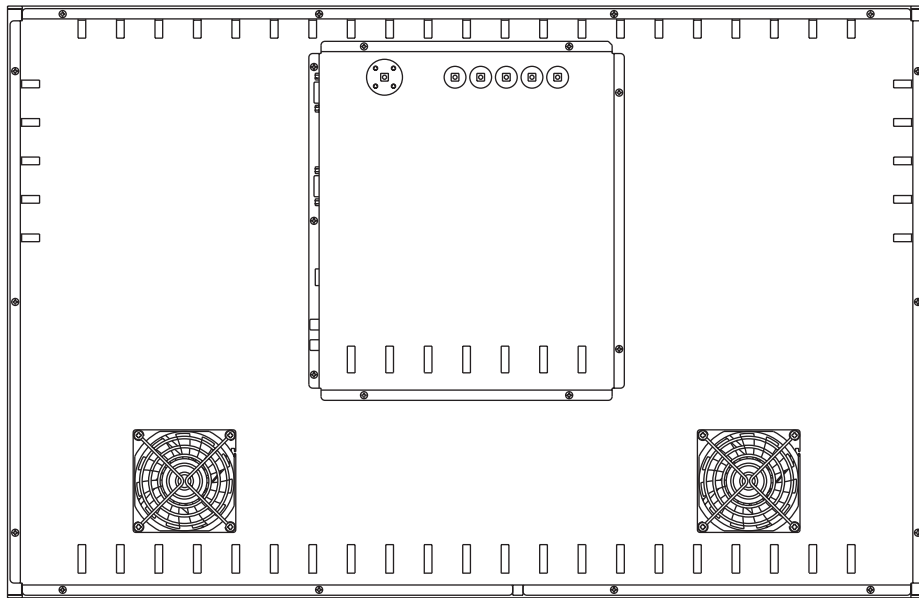

Specifications subject to change without notice.

GTT Co., Ltd.

HQ : Suite 408, Unitechvil, 1141-2, Paeksok-dong, Ilsan-gu, Koyang-shi, Kyonggi-do, Korea
TEL : +82 31 903 9780, FAX : +82 31 903 9787, <http://www.gtt.co.kr>

TAIWAN : 5F-1, No. 400 Huan Pei Road, Chung Li, Taiwan, R.O.C
TEL : +886 3 426 8255, FAX : +886 3 426 8233, <http://www.gttw.com.tw>

USA : 2360 E.Devon Ave., Suite 2006, Des Plaines, IL 60018
TEL : 847 299 5158, FAX : 847 699 1022



Product Specifications

TFT-LCD Panel

- Display Type : TFT LCD Panel
- Display Area : 29.6inch(643.2mm(H)*385.92mm(V))
- Max. Resolution : 1280*768 - 75Hz(WXGA)
- Colors : 16.7Million Colors
- Brightness : 550cd/m2 (Typical)
- Contrast : 600 : 1 (Typical)
- Response Time : 25ms (Typical)
- Viewing Angle : +/-85 deg.(H), +/-85 deg.(V)

Touch

- ELO TouchSystems : IntelliTouch(SAW : surface wave touch)
- Protection Glass (Anti-Reflection coating)

Interface

- VGA Input : D-Sub 15pin Analog RGB
- Video Input (Option) : 2 Composite, 1 S-Video
- Touch (Option)
ELO TouchSystems : RS-232 Serial

Power Specifications(Adaptor)

- DC Output : 24Vdc, 6.67A
- Power Consumption : Max. 160W
- AC Input : 100 ~ 264VAC, 47 ~ 63Hz

Heat Dissipation(Built in Fan)

- Power Input : 12Vdc (0.14A, 1.68W)
- Rated Speed : 2,800 RPM
- Max Air Flow : 31.10 CFM

OSD Control

- PC Mode : Brightness, Contrast, H/V Position, Clock, Clock phase, Color, Special, Language, Auto Config, Source, Information
- Video Mode : Brightness, Contrast, H/V Position, Video Reset, Saturation, Hue, Language, Source, Information

Mechanical & Environmental

- Surface Treatments : Black PICA Spray(Front only)
- Dimensions : 716mm(W)*461.5mm(H)*85mm(D)
- Weight : TBD
- Temperature
 - Operating : 0 ~ +50deg.C
 - Storage : -20 ~ +60deg.C
- Humidity
 - Operating : 20%RH ~ 90%RH
 - Storage : 5%RH ~ 90%RH

Available Options

- Bracket : GTT Standard or Custom
Factory mounted or User mount
- Video Input : Factory mounted
- Touch Screen : Factory mounted

International Standards

- CSA

Product Dimension

