

# Specification of LCD Module

## 規 格 書

Customer 客戶名稱	
Part No. 產品型號	<b>GPG48272QS1</b>
Product type 產品內容	Mode: Transmissive Type, TFT LCD, Positive mode 65K/262K color
RoHS 綠色產品	<input type="checkbox"/> Non-compliance <input checked="" type="checkbox"/> Compliance
Remarks 備註欄	
<input checked="" type="checkbox"/> Preliminary Specification 暫行規格 <input type="checkbox"/> Final Specification 正式規格  Signature by Customer: 客戶確認簽章:	

Issued by QA	Checked by QA		Checked by PM	Approved By	
				QA	BU
			Jones		

## Specification of LCD Module

Product No.: GPG48272QS1

Issue date: 2008/05/29

Giantplus Technology Co., LTD

15 Industrial Rd., Lu-Chu Li, Toufen Chen

Miao-Li Hsien, 351 Taiwan.

TEL: 886-37-611-611

FAX: 886-37-611-612

## TABLE OF CONTENTS

<b>1. GENERAL DESCRIPTION</b> .....	<b>4</b>
<b>2. FEATURES</b> .....	<b>4</b>
<b>3. MECHANICAL SPECIFICATION</b> .....	<b>4</b>
<b>4. MECHANICAL DIMENSION</b> .....	<b>5</b>
<b>5. MAXIMUM RATINGS (FOR IC)</b> .....	<b>6</b>
<b>6. ELECTRICAL CHARACTERISTICS</b> .....	<b>6</b>
6.1. Backlight Characteristic .....	7
6.2. Pin Description.....	8
6.3. System Interface.....	10
<b>7. ELECTRO-OPTICAL CHARACTERISTICS</b> .....	<b>15</b>
<b>8. RELIABILITY</b> .....	<b>17</b>
8.1. MTTF .....	17
8.2. Tests.....	17
<b>9. ILLUSTRATION OF LCD DATE CODE(GP)</b> .....	<b>18</b>
<b>10. ILLUSTRATION OF LCD DATE CODE(KGP)</b> .....	<b>19</b>
<b>11. ROHS COMPLIANT WARRANTY</b> .....	<b>20</b>
<b>12. PRECAUTIONS FOR USE</b> .....	<b>20</b>
12.1. Safety .....	20
12.2. Storage Conditions.....	20
12.3. Installing LCD Module .....	20
12.4. Precautions For Operation .....	21
12.5. Handling Precautions .....	21
12.6. Warranty.....	21
<b>13. FACTORY</b> .....	<b>22</b>
<b>14. REVISION HISTORY</b> .....	<b>22</b>

## 1. GENERAL DESCRIPTION

The GPG48272QS1 model is a Color TFT LCD supplied by Giantplus. This main Module has a 5.0 inch diagonally measured active display area with 480 X RGB X 272 resolutions. Each pixel is divided into Red, Green and Blue sub-pixels and dots that are arranged in vertical stripes. LCD color is determined with Dithering 16.7M Color signal for each pixel. The GPG48272QS1 has been designed to apply the interface method that enables low power, high speed, and high contrast. The GPG48272QS1 is intended to support applications where thin thickness, wide viewing angle, low power are critical factors and graphic displays are important.

## 2. FEATURES

Display Mode	TFT module, Trans-missive Type, Positive mode
Display Format	RGB vertical stripe
Color	16.7M color
Input Data	RGB data bus, 24 bit parallel data
Viewing Direction	6 O'clock
Backlight	White LED
Driver IC	HX8227-A HX8655-A


## 3. MECHANICAL SPECIFICATION

Item	Specifications	Unit
Dimensional outline	120.7 (W) × 75.8 (H) × 3.1 (D)	mm
Resolution	480 × RGB × 272	Pixel
Active area	110.88 (W) × 62.83 (H)	mm
Pixel pitch	0.231 (W) × 0.231 (H)	mm

\*Not Include FPC

\*1 pixel = 3 dots = Red dot +Green dot +Blue dot

## 4. MECHANICAL DIMENSION

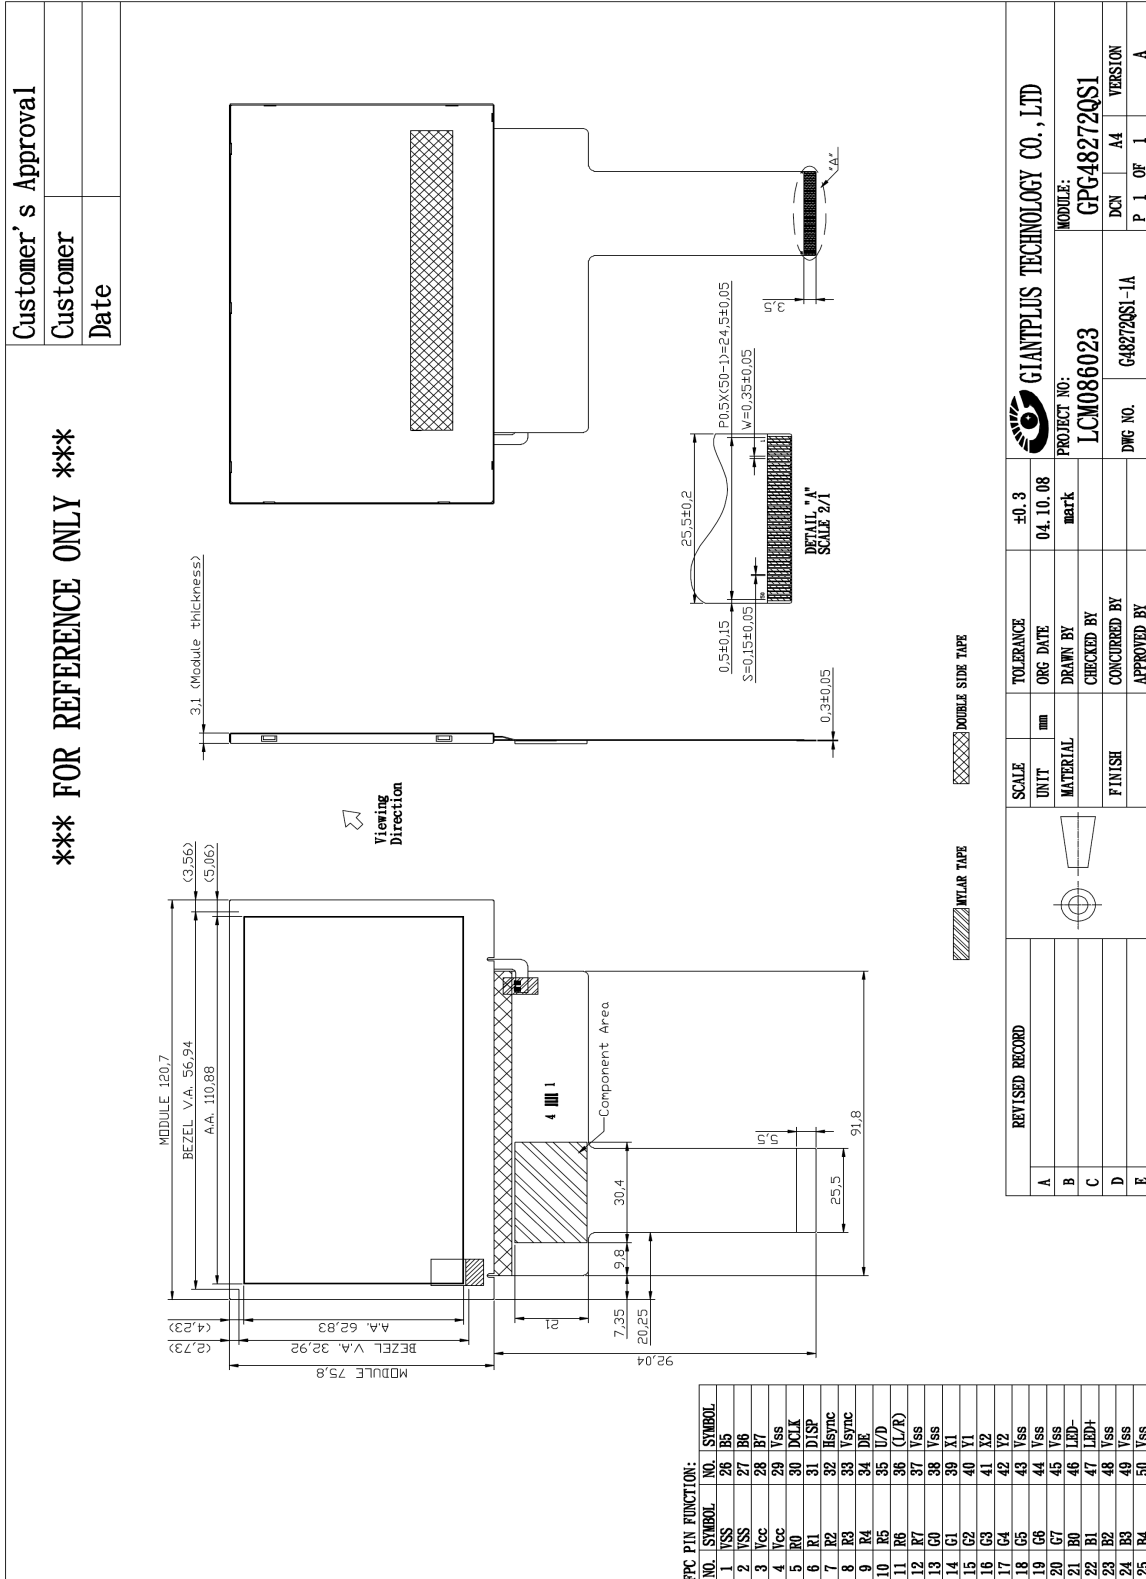

## 5. MAXIMUM RATINGS (for IC)

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

Item	Symbol	Values		Unit	Condition
		Min.	Max.		
Power Supply for Logic	VCC	-0.3	6.0	V	
Input voltage	V <sub>i</sub>	-0.3	VCC+0.3	V	
Storage Temperature	T <sub>ST</sub>	-30	80	°C	
Operating Temperature (Ambient Temperature)	T <sub>OP</sub>	-20	70	°C	
Singal LED forward current	I <sub>F</sub>	-	30	mA	
Singal LED pulse forward current	I <sub>FP</sub>	-	100	mA	
Singal LED reverse current	V <sub>R</sub>	-	5	V	
Humidity	-	-	90	%RH	Note1

Note1: T<sub>A</sub> ≤ 40°C Without dewing

2. All of voltage listed above are with respective to GND=VSS=0V.
3. Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above.

## 6. ELECTRICAL CHARACTERISTICS

Typical operating conditions (GND=AVSS=0V)


ITEM	SYMBOL	Min	Typ	Max	Units
Power Supply	VCC	3.0	3.3	3.6	V
LCD input current	ICC	---	60	---	mA
Driver Input signal voltage	V <sub>IN</sub>	0		VCC	V
	V <sub>TH</sub>	0.7*VCC	-	VCC	V
	V <sub>TL</sub>	0	-	0.3*VCC	V

Note1: T<sub>A</sub> ≤ 40°C Without dewing

## 6.1. Backlight Characteristic


ITEM	SYMBOL	CONDITION	Min	Typ	Max	Units
LED module voltage	$V_{LED}$	$I_{LED}=20mA$	27.0	33.0	37.0	V
LED module current	$I_{LED}$	$V_{LED}=33.0V$	---	20	---	mA
Power consumption	$W_{LED}$	$I_{LED}=20mA$		660.0		mW
Surface brightness uniform (without LCD)	$L_D$	$I_{LED}=20mA$ $V_{LED}=33.0V$	---	80	---	%

★ 1 Backlight LED Circuit :

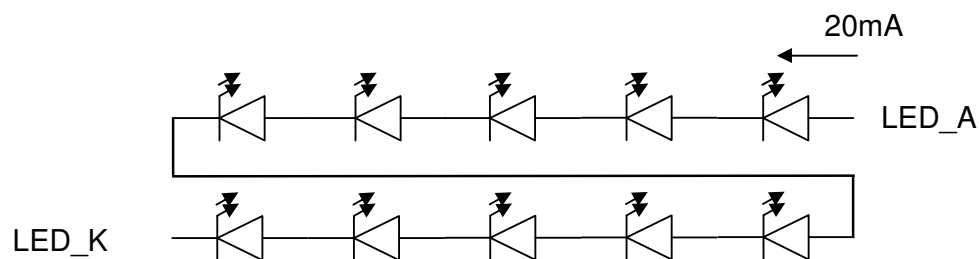

★2 Uniform measure condition :

- To Measure 9 point. Measure location is show below :
- Uniform = (Min. brightness / Max. brightness)×100%
- Best Contrast, Main and sub panel all dots turn ON (White screen)

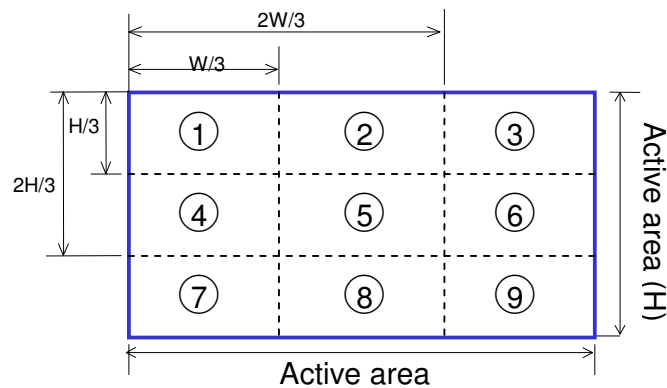

## 6.2.Pin Description


NO	Pin Name	Description
1	VSS	Ground
2	VSS	Ground
3	Vcc	Power Supply
4	Vcc	Power Supply
5~12	R0 ~ R7	Red Data Bit 0 ~ 7
13~20	G0 ~ G7	Green Data Bit 0 ~ 7
21~28	B0 ~ B7	Blue Data Bit 0 ~ 7
29	Vss	Ground
30	DCLK	Dot Data Clock
31	DISP	Display on / Display off Note : DISP set High , input data are valid . DISP set Low , input data are invalid .
32	Hsync	Horizontal Sync Input
33	Vsync	Vertical Sync Input
34	DE	Data Enable Control DE is High , data can be access . DE is Low , data can not be access .
35	U/D	Shift up or down Control U/D set High→UP to Down. U/D set Low→Down to UP.
36	(L/R)	(Shift Left or Right Control) L/R set High→Left to Right. L/R set Low→Right to Left.
37	Vss	Ground
38	Vss	Ground
39	NC	NC
40	NC	NC
41	NC	NC
42	NC	NC
43	Vss	Ground

44	Vss	Ground
45	Vss	Ground
46	VLED -	LED Ground (K)
47	VLED +	LED Power (A)
48	Vss	Ground
49	Vss	Ground
50	Vss	Ground

## 6.3. System Interface

### 6.3.1. Gate Driver Timing Control

HX8227-A01 outputs gate driver timing signals from CKV, STV, and OEV pins.

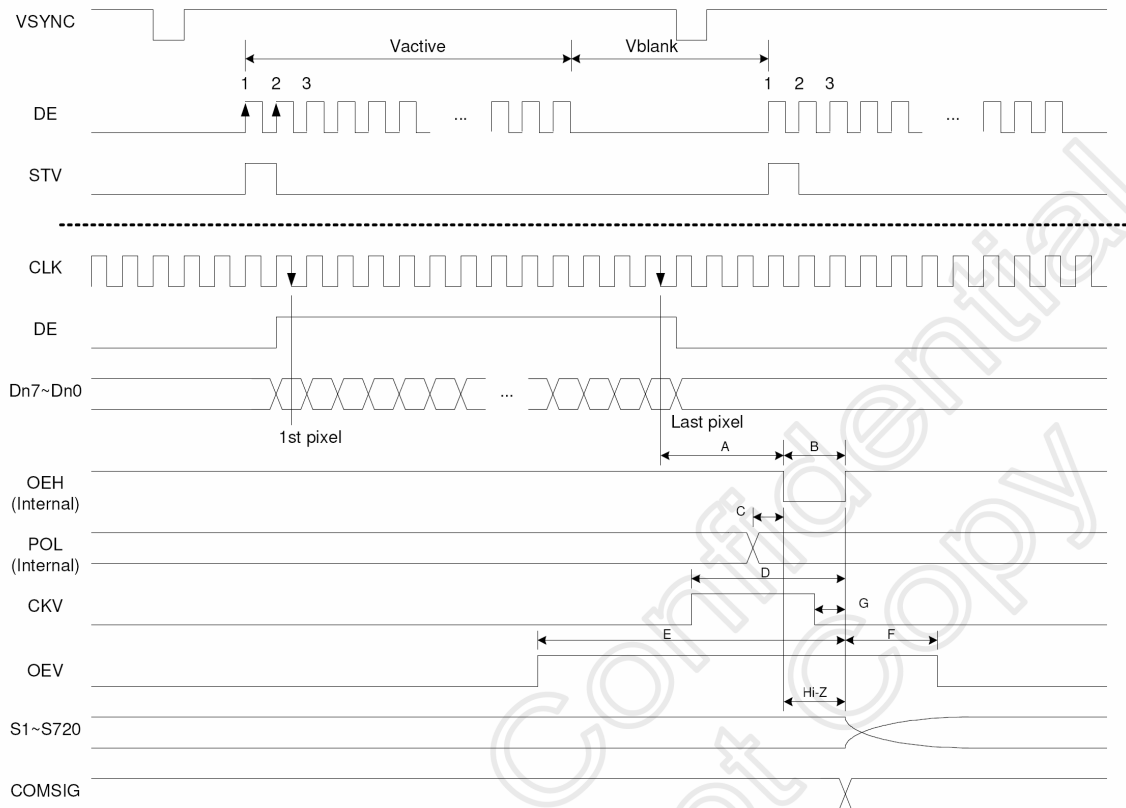


Timing	480RGBx272	480RGBx240	240RGBx320	240RGBx240
A	8	8	4	4
B	4	4	2	2
C	0	0	0	0
D	10	10	5	5
E	34	34	17	17
F	6	6	3	3
G	2	2	1	1

**Note:** The above parameters are for 24-bit parallel RGB interface. For 8-bit serial RGB interface, the




### 6.3.2. Power ON/OFF Control

When DISP pin is pulled “H”, blank data is outputted for 10-frames first, from the falling edge of the following VSYNC signal. Similarly, when DISP is pulled “L”, 10-frames of blank data will be outputted from the falling edge of the following VSYNC, too. The blank data would be gray level 0 for normally black LC (NBW=“H”), and be gray level 255 for normally white LC (NBW=“L”).

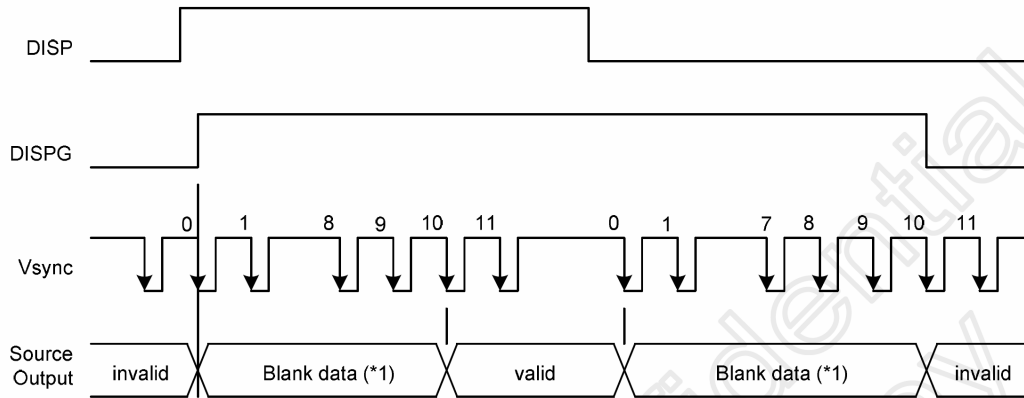

### 6.3.3. Reset

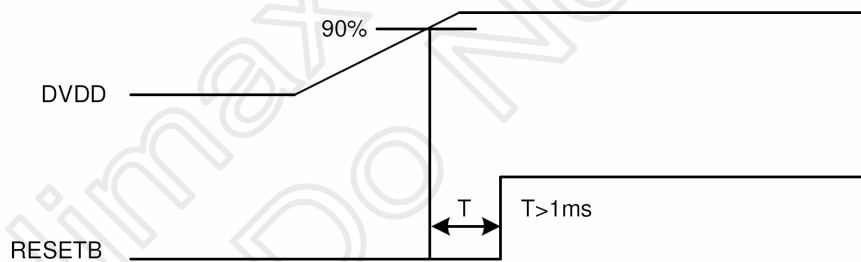

### 6.3.4. Timing Specification

(480RGBx272, TA =25°C, DVDD=2.25V to 3.6V, DVSS= 0V)

PARAMETER	Symbol	Min.	Typ.	Max.	Unit
Clock cycle	f <sub>CLK</sub>	-	9	15	MHz
Hsync cycle	1/th	-	17.14	-	KHz
Vsync cycle	1/tv	-	59.94	-	Hz
Horizontal Signal					
Horizontal cycle	th <sup>*2</sup>	-	525	-	CLK
Horizontal display period	thd	-	480	-	CLK
Horizontal front porch	thf	2	-	-	CLK
Horizontal pulse width	thp	2	41	-	CLK
Horizontal back porch	thb	2	2	-	CLK
Vertical Signal					
Vertical cycle	tv	-	286	-	H
Vertical display period	tvd	-	272	-	H
Vertical front porch	tvf	1	2	-	H
Vertical pulse width	tvp	1	10	-	H
Vertical back porch	tvb	1	2	-	H

**Note:**


1. The table is parallel interface. Clock frequency and horizontal signal parameters are tripled in serial

interface. The maximum clock frequency of serial interface is 33MHz

2. thd=480CLK, thf=2CLK, thp=41CLK, thb=2CLK, thf + thp + thb > 44CLK. (CLK=1/fCLK ,H=th)



### 6.3.5. Timing Chart

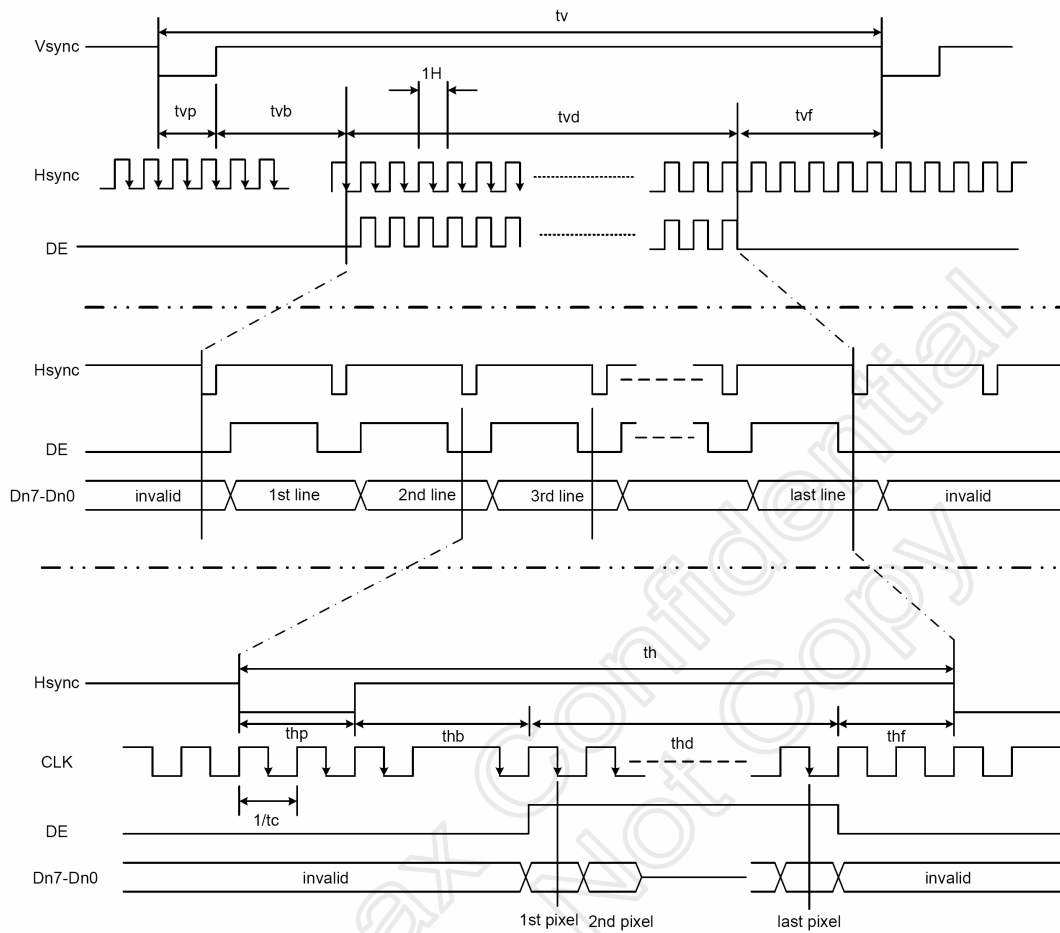



6.3.3 Color Data Assignment

COLOR	INPUT DATA	R DATA								G DATA								B DATA							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		MSB				LSB				MSB				LSB				MSB				LSB			
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(1)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	GREEN(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	GREEN(254)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
BLUE	BLUE(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	BLUE(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	BLUE(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1



## 7. ELECTRO-OPTICAL CHARACTERISTICS

Parameter		Symbol	Min.	Typ.	Max.	Units	Note
Luminance of white		Lwh	---	350	---	cd/m <sup>2</sup>	
Contrast Ratio		CR	280	350	---	-	*5)
Response Time (Tr+Tf)			---	25	30	ms	*4)
Viewing Angle (CR ≥ 10)	X axis right (ψ=0°)	θx	---	65	---	Degree	*6)
	X axis left (ψ=180°)	θx	---	65	---		
	Y axis up (ψ=90°)	θy	---	60	---		
	Y axis down (ψ=270°)	θy	---	50	---		
CIE color Coordinates	White	Wx	---	0.313	---		BM7; 2° angle
		Wy	---	0.329	---		
	Red	Rx	---	0.591	---		
		Ry	---	0.332	---		
	Green	Gx	---	0.345	---		
		Gy	---	0.577	---		
Blue	Bx	---	0.153	---			
	By	---	0.109	---			

- For LCM

Note 1. Ambient temperature = 25°C ± 2°C.

Note 2. To be measured in the dark room.


Note 3. To be measured at the center area of panel with a viewing cone of 2° by Topcon luminance meter BM-7, after 10 minutes operation (module).

Note 4. Definition of response time :

The output signals of photo detector are measured when the input signals are changed from "black" to "white" ( falling time ) and from "white" to "black" ( rising time ) ,respectively.

The response time is defined as the time interval between the 10% and 90 % of amplitudes.

Refer to figure as below :

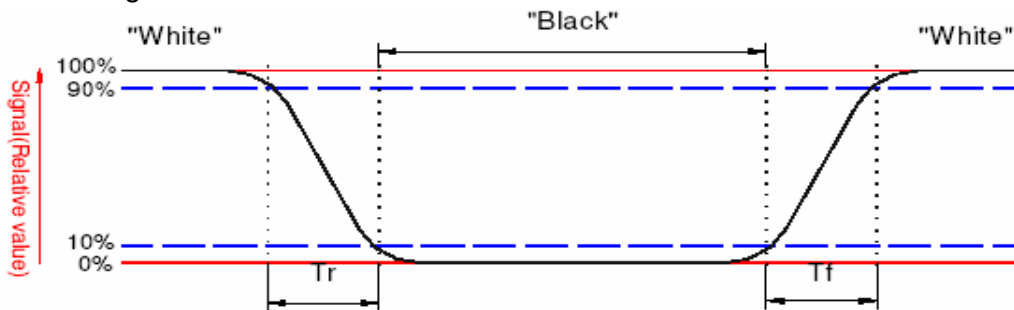


Note 5. Definition of contrast ratio :

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 6. Definition of viewing angle ( LCD-5200 ) :

Refer to the figure as below

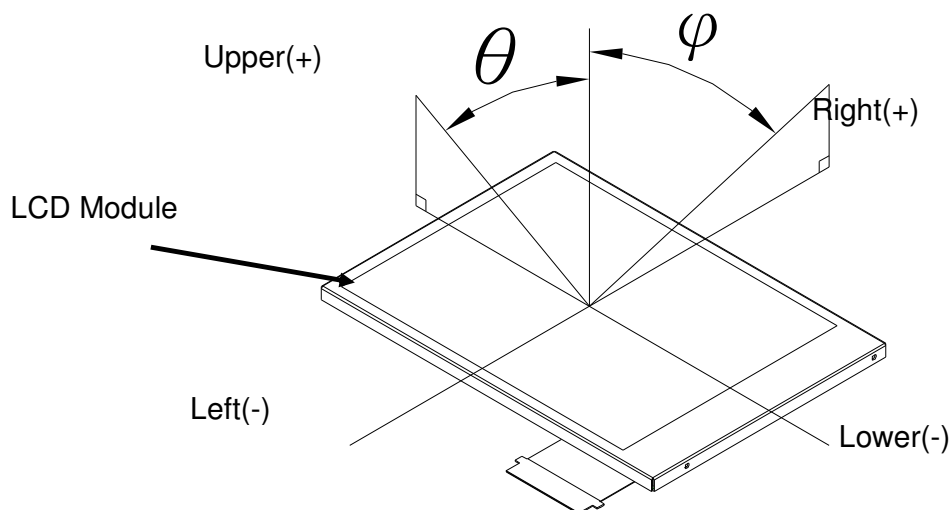

## 8. RELIABILITY

### 8.1. MTTF

The LCD module shall be designed to meet a minimum MTTF value of 50,000 hours with normal condition. (25°C in the room without sunlight; not include life time of backlight)

### 8.2. Tests

NO.	ITEM	CONDITION	CRITERION
1	High Temperature Operating	70°C      240 hrs	◦ No defect of Operational function in room temperature are allowable.
2	Low Temperature Operating	-20°C      240 hrs	
3	High Temperature Non-Operating	80°C      240 hrs	
4	Low Temperature Non-Operating	-30°C      240 hrs	◦ Leakage current should be below double of initial value.
5	High Temperature/ Humidity Non-Operating	50°C,90%RH      240 hrs	
6	Temperature Shock Non-Operating	-30°C ←→ 80°C (30min) (5min) (30min) 10 CYCLES	
7	Electro-static Discharge	HBM: ±2kv	

Note 1: Test after 24 hours in room temperature.

Note 2: The sampling above is individually for each reliability testing condition.


Note 3: The color fading of polarizing filter should not care.

Note 4: All of the reliability testing chamber above, is using D.I. water.(Min value: 1.0 MΩ-cm)

Note 5: In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.




## 9. ILLUSTRATION OF LCD DATE CODE(GP)

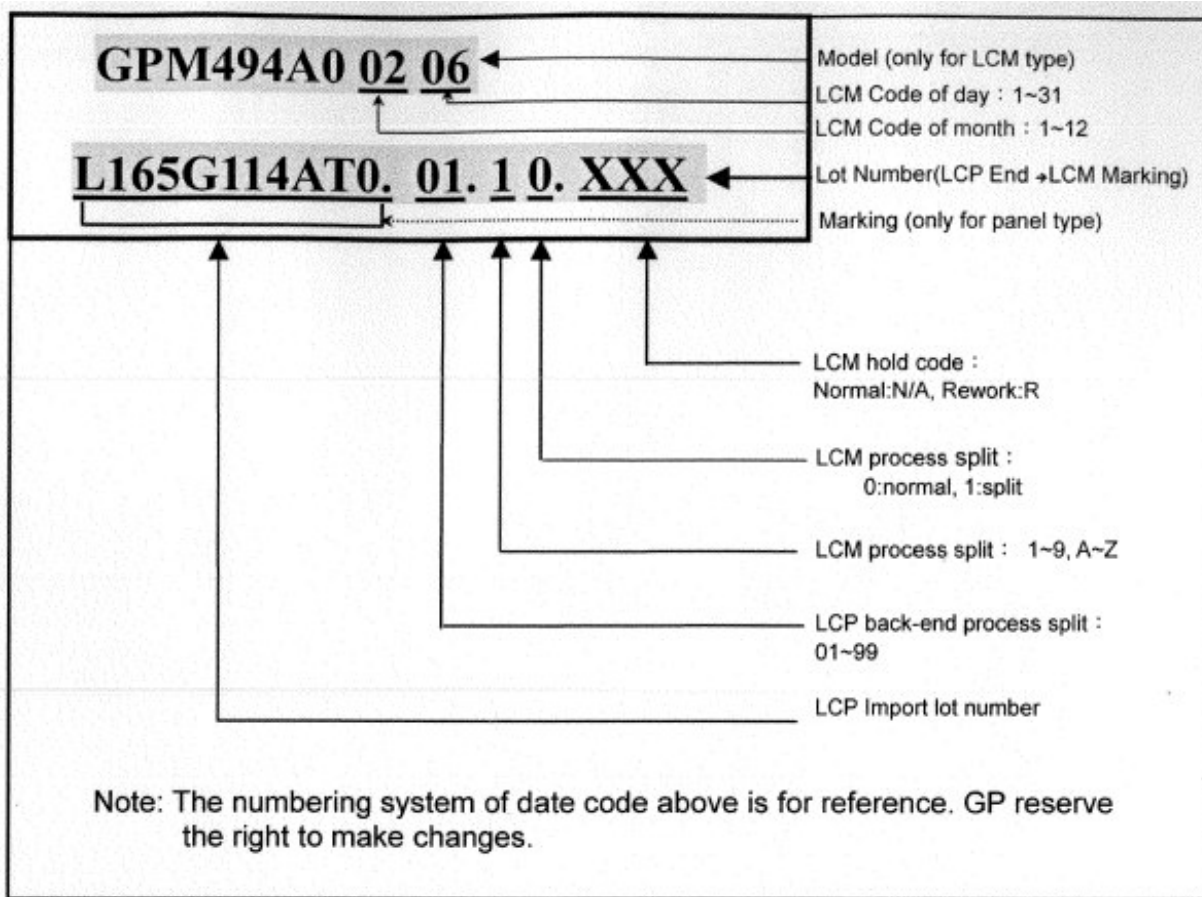



# 10.ILLUSTRATION OF LCD DATE CODE(KGP)

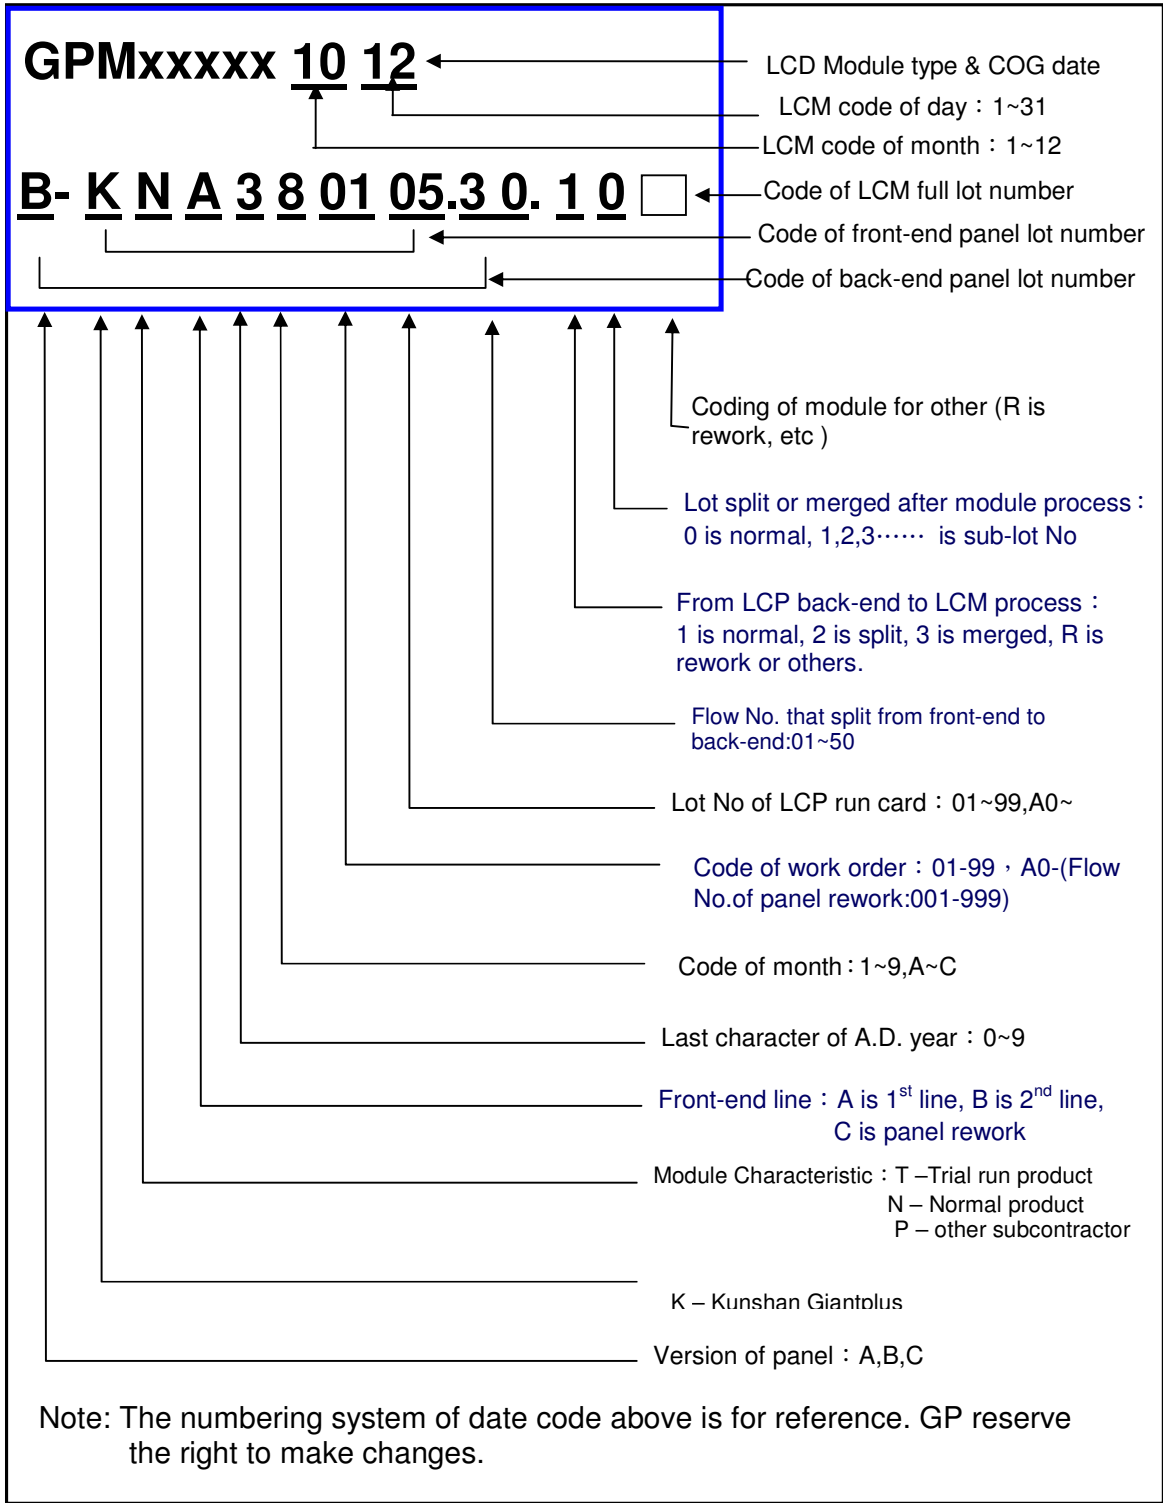



## 11. RoHS COMPLIANT WARRANTY

RoHS Hazardous substances including:

- Cd < 100 ppm
- Pb < 1000 ppm
- Hg < 1000 ppm
- Cr +6 < 1000 ppm
- PBDE < 1000 ppm
- PBB < 1000 ppm

## 12. PRECAUTIONS FOR USE

### 12.1. Safety

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

### 12.2. Storage Conditions

- (1) Store the panel or module in a dark place where the temperature is  $23\pm 5^{\circ}\text{C}$  and the humidity is below  $50\pm 20\%\text{RH}$ .
- (2) Store in anti-static electricity container.
- (3) Store in clean environment, free from dust, active gas, and solvent.
- (4) Do not place the module near organics solvents or corrosive gases.
- (5) Do not crush, shake, or jolt the module.
- (6) Do not exposed to direct sun light of fluorescent lamps.

### 12.3. Installing LCD Module

Attend to the following items when installing the LCM.

- (1) Cover the surface with a transparent protective plate or touch panel to protect the polarizer and LC cell.
- (2) When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be  $\pm 0.1\text{mm}$ .



## 12.4. Precautions For Operation

- (1) Viewing angle varies with the change of liquid crystal driving voltage ( $V_0$ ). Adjust  $V_0$  to show the best contrast.
- (2) Driving the LCD in the voltage above the limit will shorten its lifetime.
- (3) Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- (4) When turning the power on, input each signal after the positive/negative voltage becomes stable.
- (5) Do not apply water or any liquid on product which composed of T/P.

## 12.5. Handling Precautions

- (1) Avoid static electricity which can damage the CMOS LSI; please wear the wrist strap when handling.
- (2) The polarizing plate of the display is very fragile. so, please handle it very carefully.
- (3) Do not give external shock.
- (4) Do not apply excessive force on the surface; it may cause display abnormal .
- (5) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- (6) Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (7) Do not operate it above the absolute maximum rating.
- (8) Do not remove the panel or frame from the module.
- (9) Do not apply water or any liquid on product, which composed of T/P.

## 12.6. Warranty

- (1) The period is within 12 months since the date of shipping out under normal using and storage conditions.
- (2) The warranty will be avoided in case of defect induced by customer.



## 13.FACTORY

For the consideration of mass production convenience, this model will be manufactured in the factories listed below.

FACTORY NAME: GIANTPLUS TECHNOLOGY CO., LTD  
FACTORY ADDRESS: 15 Industrial Rd., Lu-Chu Li, Toufen Town  
351 Miao-Li County, Taiwan, R.O.C..  
FACTORY PHONE: TEL: 886-37-611-611 FAX: 886-37-613-166

FACTORY NAME: KUNSHAN GIANTPLUS OPTOELECTRONICS  
TECHNOLOGY CO., LTD.  
FACTORY ADDRESS: KunShan City, JiangShu Province, China.  
FACTORY PHONE: TEL:86-512-57780-988 FAX : 86-512-57780-503

FACTORY NAME: SHENZHEN GIANTPLUS OPTOELEC. DISPLAY CO., LTD.  
FACTORY ADDRESS: Building A, Distict A ,MinZhu99 Industrial City,  
ShaJing Industrial Park, BaoAn District, ShenZhen, China  
FACTORY PHONE: TEL: 86-755-29720-088 FAX : 86-755-29720-828

## 14.REVISION HISTORY

Version	Revise record	Date
A	New version	2008/05/29