

## SPECIFICATIONS

CUSTOMER : CFR015

SAMPLE CODE : SH128128T-040-L02Q

MASS PRODUCTION CODE : PH128128T-040-L02Q

SAMPLE VERSION : 01


SPECIFICATIONS EDITION : 001

DRAWING NO. (Ver.) : JLMD-PH128128T-040-L02Q\_001

PACKAGING NO. (Ver.) :

**Customer Approved**

Date:



Approved	Checked	Designer
閔偉 Ryan Yan	劉進	WUZHIJUN

- ☒ Preliminary specification for design input
- ☐ Specification for sample approval

## POWERTIP TECH. CORP.

**Headquarters:** No.8, 6<sup>th</sup> Road, Taichung Industrial Park,  
Taichung, Taiwan  
台中市 407 工業區六路 8 號

TEL: 886-4-2355-8168  
FAX: 886-4-2355-8166

E-mail: [sales@powertip.com.tw](mailto:sales@powertip.com.tw)  
[Http://www.powertip.com.tw](http://www.powertip.com.tw)



## **Contents**

### **1. SPECIFICATIONS**

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics

### **2. MODULE STRUCTURE**

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
- 2.3 Timing Characteristics

### **3. QUALITY ASSURANCE SYSTEM**

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

### **4. RELIABILITY TEST**

- 4.1 Reliability Test Condition

### **5. PRECAUTION RELATING PRODUCT HANDLING**

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

**Appendix : LCM Drawing**

## 1. SPECIFICATIONS

### 1.1 Features

#### Main LCD Panel

Item	Standard Value
Display Type	128(R、G、B) * 128 Dots
LCD Type	Normally white TN, Transmissive type
Screen size(inch)	1.4" inch
Viewing Direction	12 O'clock
Color configuration	R.G.B. vertical stripe
Backlight	White LED
Interface	8Bits data bus (8080 MCU Parallel System interface)
Other(controller / driver IC)	Sitronix: ST7715R
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer web side : <a href="http://www.powertip.com.tw/news/LatestNews.asp">http://www.powertip.com.tw/news/LatestNews.asp</a>

### 1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	31.1 (W)*36.9 (L) *2.85(H)	mm

#### TFT LCD Panel

Item	Standard Value	Unit
Viewing Area	26.5 (W) *27.5 (L)	mm
Active Area	25.5 (W) * 26.5 (L)	mm

Note : For detailed information please refer to LCM drawing.

### 1.3 Absolute Maximum Ratings

#### Module

Item	Symbol	Condition	Min.	Max.	Unit
Supply Voltage	VDD	-	-0.3	+4.8	V
Supply Voltage(Logic)	VDDI	-	-0.3	+4.6	V
Supply Voltage (Digital)	VCC	-	-0.3	+1.95	V
Driver supply voltage	VGH-VGL	-	-0.3	+30	V
Logic input voltage range	VIN	-	-0.3	VDDI+0.3	V
Logic output voltage range	VO	-	-0.3	VDDI+0.3	
Operating Temperature	TOP	-	-20	+70	°C
Storage Temperature	TST	-	-30	+80	°C
Storage Humidity	HD	Ta $\leq$ 60 °C	0	90	%RH

### 1.4 DC Electrical Characteristics

#### Module

GND = 0V, Ta = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
System voltage	VDD	-	2.6	2.8	3.3	V
Interface operation voltage	VDDI	-	1.65	1.8	3.7	
Logic-high input voltage	VIH	-	0.7VDDI	-	VDDI	V
Logic-low input voltage	VIL	-	VSS	-	0.3VDDI	V
Logic-high output voltage	VOH	IOH=-1.0mA	0.8VDDI	-	VDDI	V
Logic-low output voltage	VOL	IOL=+1.0mA	VSS	-	0.2VDDI	V
Supply Current	IDD	VDD=2.8V, Pattern= TBD *1	-	TBD	TBD	mA

Note1 : Maximum current display.

## 1.5 Optical Characteristics

### TFT LCD Panel

VDD =2.8V, Ta=25°C

Item	Symbol	Condition	Min.	Typ.	Max.	unit	
Response time	Tr + Tf	Ta = 25°C $\theta X, \theta Y = 0^\circ$	-	TBD	-	ms	Note2
Viewing angle	Top	$\theta Y+$	-	TBD	-	Deg.	Note4
	Bottom	$\theta Y-$	-	TBD	-		
	Left	$\theta X-$	-	TBD	-		
	Right	$\theta X+$	-	TBD	-		
Contrast ratio	CR		TBD	TBD	-	-	Note3
Color of CIE Coordinate (With B/L)	White	X	TBD	TBD	TBD	-	Note1
		Y	TBD	TBD	TBD		
	Red	X	TBD	TBD	TBD		
		Y	TBD	TBD	TBD		
	Green	X	TBD	TBD	TBD		
		Y	TBD	TBD	TBD		
	Blue	X	TBD	TBD	TBD		
		Y	TBD	TBD	TBD		
Average Brightness Pattern=white display (With B/L)	IV	IF=20mA	TBD	TBD	-	cd/m2	Note1
Uniformity (With B/L)	$\Delta B$	IF=20mA	80	-	-	%	Note1

Note1:

1 :  $\Delta B = B(\min) / B(\max) \times 100\%$ .


2 : Measurement Condition for Optical Characteristics:

a : Environment: 25°C±5°C / 60±20%R.H, no wind, dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 ± 50 mm, ( $\theta = 0^\circ$ ).

c : Equipment: TOPCON BM-7 fast, (field 1°), after 10 minutes operation.


d : The uncertainty of the C.I.E coordinate measurement ±0.01, Average Brightness ± 4%.

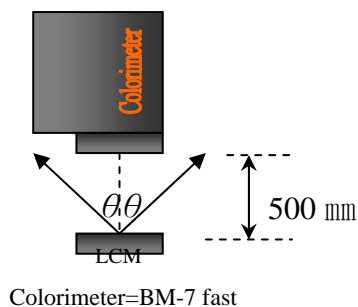

**Note2: Definition of response time:**

The output signals of photo detector are measured when the input signals are changed from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

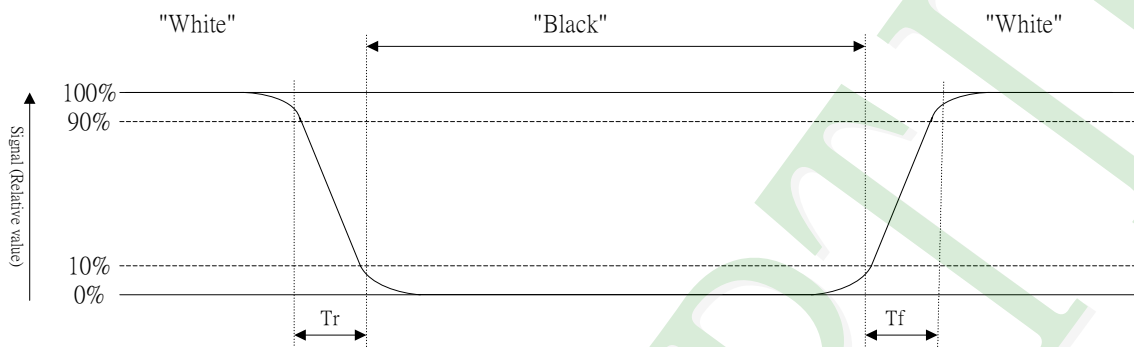


**Note3: Definition of contrast ratio:**

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

**Note4: Definition of viewing angle:**

Refer to figure as below:

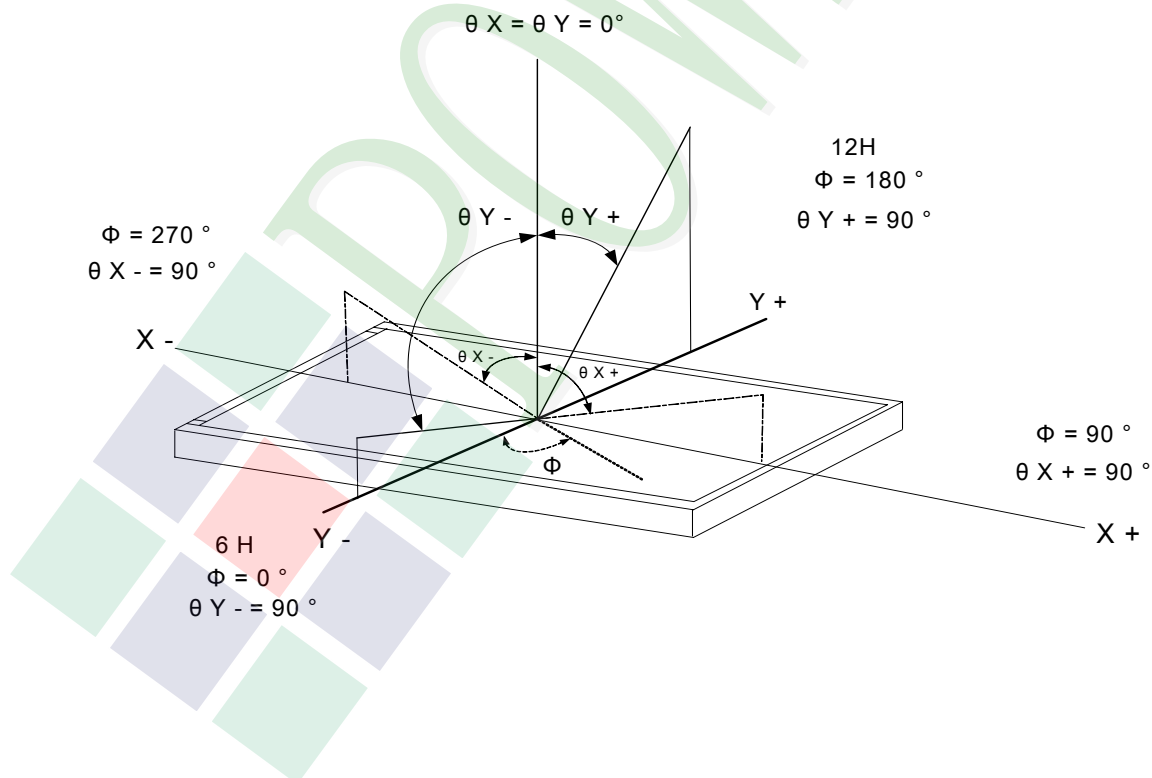

## 1.6 Backlight Characteristics

### Maximum Ratings

Item	Symbol	Conditions	Min.	Max.	Unit
Forward Current	IF	Ta =25℃	-	TBD	mA
Reverse Current	IR	Ta =25℃	-	TBD	mA
Forward Voltage	VF	Ta =25℃	-	TBD	V
Reverse Voltage	VR	Ta =25℃	-	TBD	V
Power Dissipation	PD	Ta =25℃	-	TBD	mW

### Electrical / Optical Characteristics

Electrical / Optical Characteristics						
Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF= 20mA	-	3.2	TBD	V
Average Brightness (with LCD)	IV	IF= 20mA	TBD	TBD	-	cd/m <sup>2</sup>
Color of CIE Coordinate (with LCD)	X	IF= 20mA	TBD	TBD	TBD	-
	Y		TBD	TBD	TBD	
Color	White					




## 2. MODULE STRUCTURE

### 2.1 Counter Drawing

#### 2.1.1 LCM Mechanical Diagram

\* See Appendix

#### 2.1.2 Block Diagram

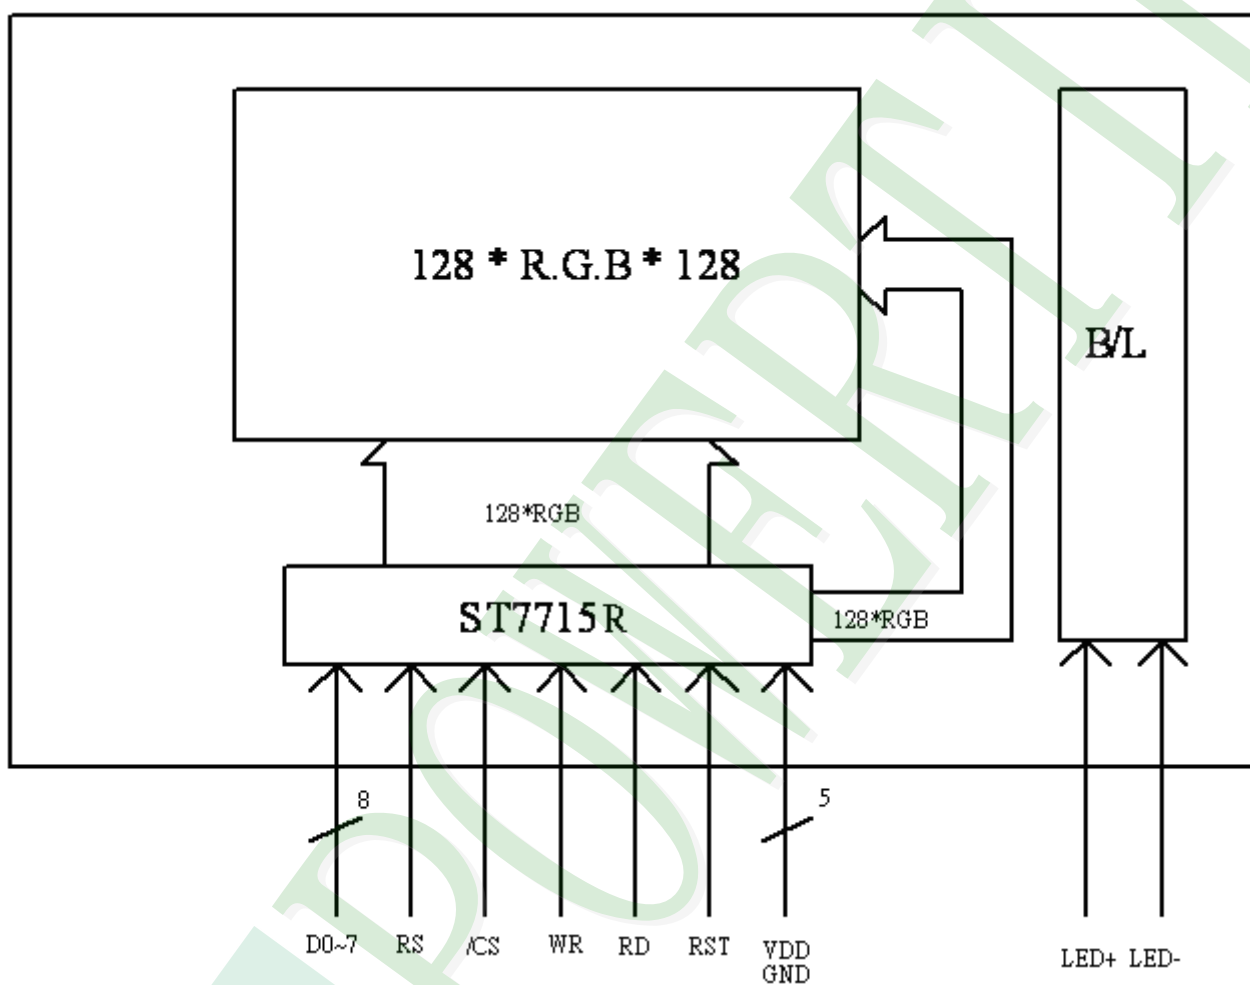


## 2.2 Interface Pin Description

Pin NO	Symbol	Function
1	LED+	Backlight LED anode input pin.
2	LED-	Backlight LED cathode input pin.
3	GND	System ground
4	VDD	Power supply for analog, digital system and booster circuit.
5	VDD	
6	RD	Read enable in 8080 MCU parallel interface.
7	RS	Display data/command selection pin in MCU interface. RS = '1': display data or parameter. RS = '0': command data.
8	D1	D[7:0] are used as MCU parallel interface data bus.
9	D3	
10	D5	
11	D7	
12	RST	This signal will reset the device and it must be applied to properly initialize the chip. Signal is active low.
13	/CS	Chip selection pin, Low enable
14	D6	D[7:0] are used as MCU parallel interface data bus.
15	D4	
16	D2	
17	D0	
18	WR	Write enable in MCU parallel interface.
19	GND	System ground
20	GND	
21	VDDI	Power supply for I/O system.
22	AVCL	A power supply pin for generating GVCL. Connect a capacitor for stabilization.

## 2.3 Timing Characteristics

Parallel interface characteristics: 8-bit bus (8080 series MCU interface)

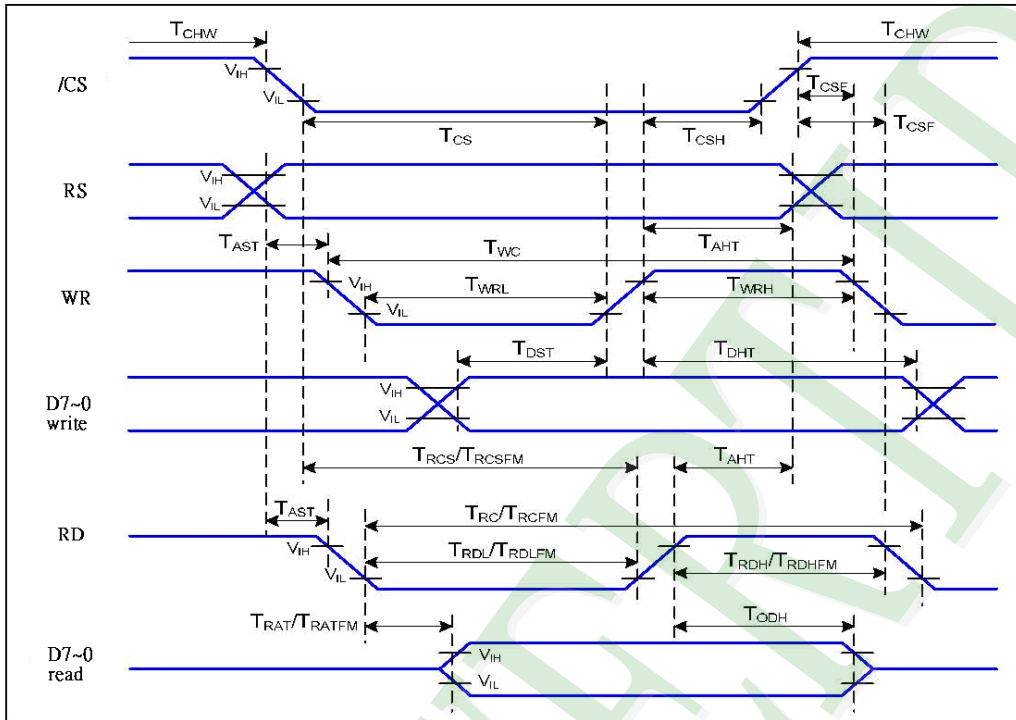

Parallel interface timing characteristics (8080 series MCU interface)


Ta=25 °C, VDDI=1.65~3.7V, VDD=2.7~3.3V


Signal	Symbol	Parameter	Min	Max	Unit	Description
RS	TAST	Address setup time	0		ns	
	TAHT	Address hold time (Write/Read)	10		ns	
/CS	TCHW	Chip select "H" pulse width	0		ns	
	TCS	Chip select setup time (Write)	15		ns	
	TRCS	Chip select setup time (Read ID)	45		ns	
	TRCSFM	Chip select setup time (Read FM)	355		ns	
	TCSF	Chip select wait time (Write/Read)	10		ns	
	TCSH	Chip select hold time	10		ns	
WR	TWC	Write cycle	66		ns	
	TWRH	Control pulse "H" duration	15		ns	
	TWRL	Control pulse "L" duration	15		ns	
RD[ID]	TRC	Read cycle (ID)	160		ns	When read ID data
	TRDH	Control pulse "H" duration (ID)	90		ns	
	TRDL	Control pulse "L" duration (ID)	45		ns	
RD[FM]	TRCFM	Read cycle (FM)	450		ns	When read from frame memory
	TRDHFM	Control pulse "H" duration (FM)	90		ns	
	TRDLFM	Control pulse "L" duration (FM)	355		ns	
D7~0	TDST	Data setup time	10		ns	For CL=30pF
	TDHT	Data hold time	10		ns	
	TRAT	Read access time (ID)		40	ns	
	TRATFM	Read access time (FM)		340	ns	
	TODH	Output disable time	20	80	ns	

8080 parallel Interface Characteristics

### 3. QUALITY ASSURANCE SYSTEM

#### 3.1 Quality Assurance Flow Chart

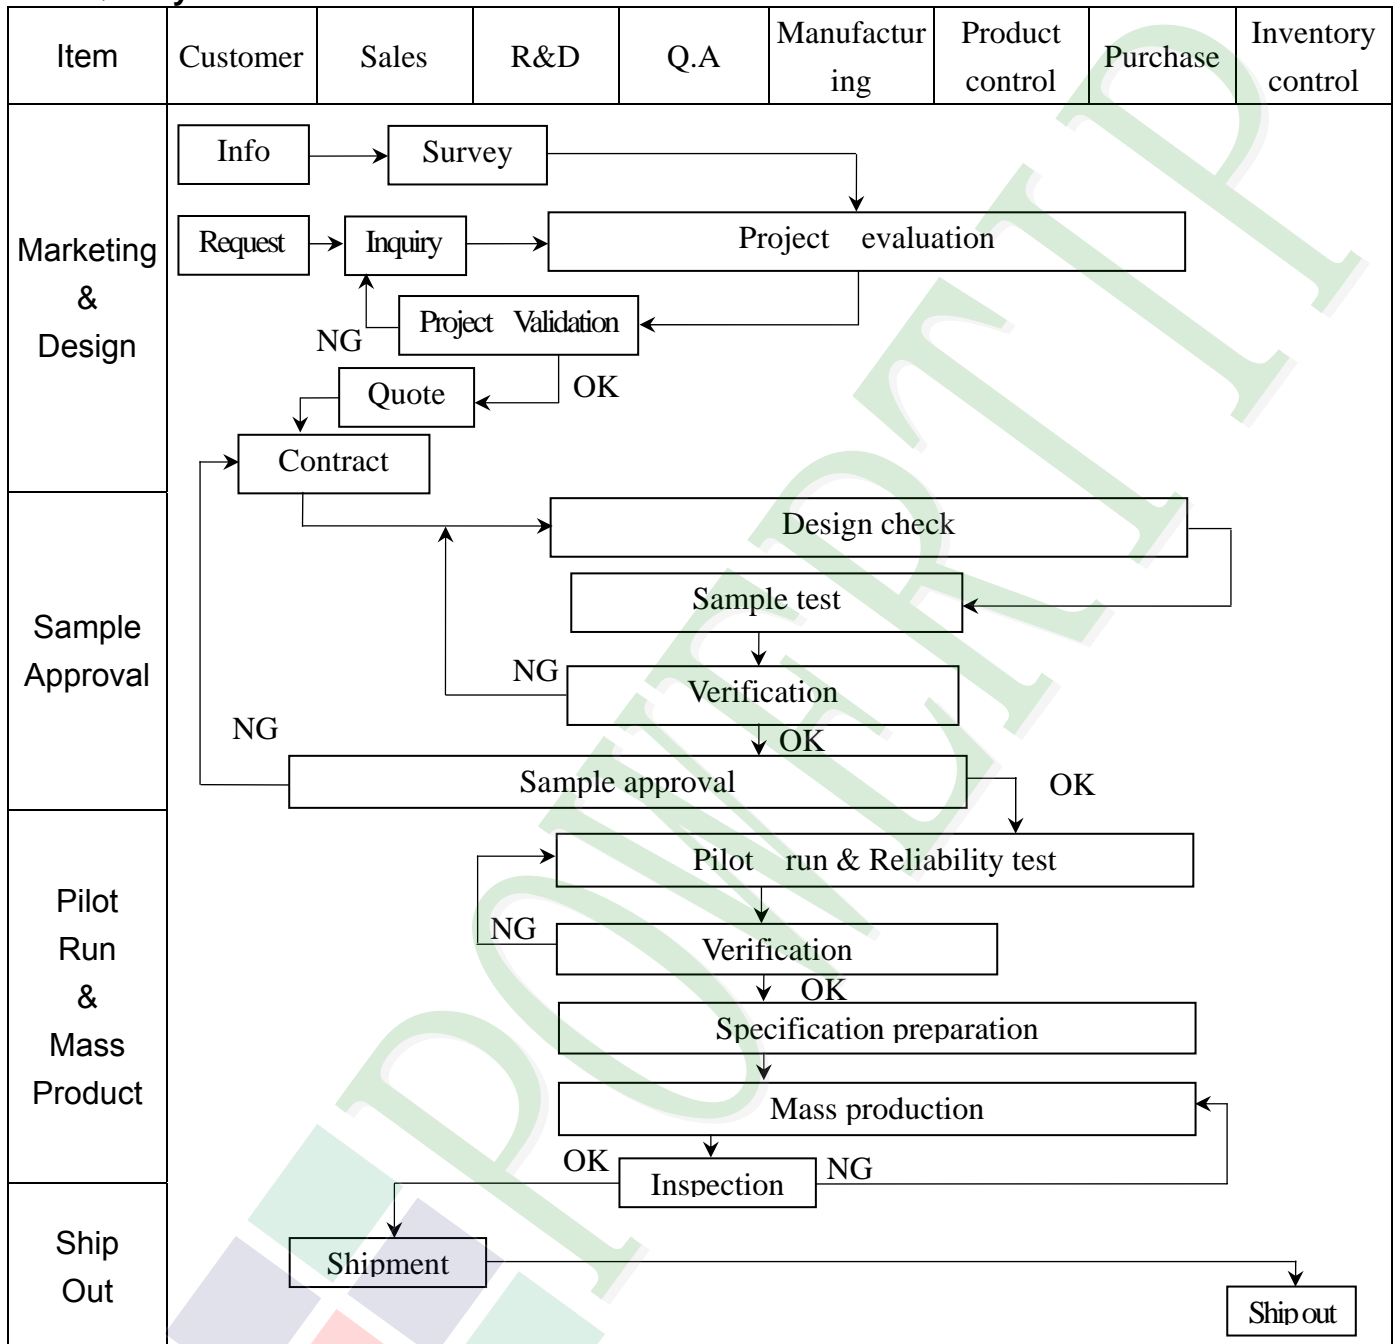

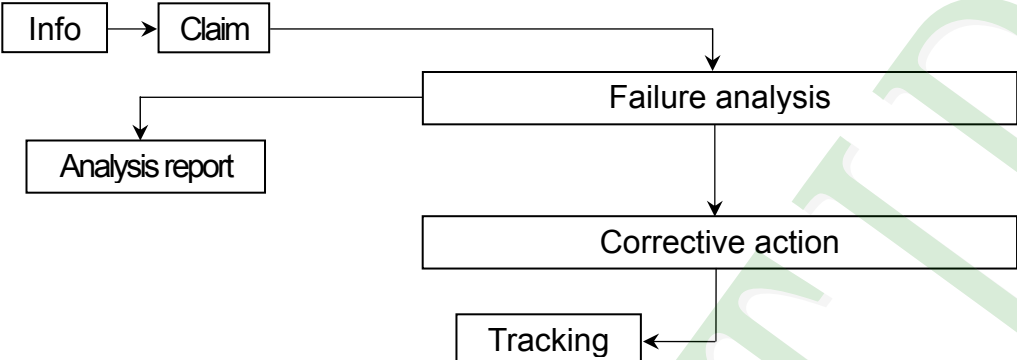Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD     Info[Info] --&gt; Claim[Claim]     Claim --&gt; Failure[Failure analysis]     Failure --&gt; Analysis[Analysis report]     Failure --&gt; Corrective[Corrective action]     Corrective --&gt; Tracking[Tracking]           </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

## 3.2. Inspection Specification

◆Scope : The document shall be applied to TFT-LCD Module for less than 3.5" (Ver.B01).

◆Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II.

◆Equipment : Gauge 、MIL-STD 、Powertip Tester 、Sample

◆Defect Level : Major Defect AQL : 0.4 ; Minor Defect AQL : 1.5


◆OUT Going Defect Level : Sampling.

◆Standard of the product appearance test :


a. Manner of appearance test :

(1). The test best be under 20W×2 fluorescent light , and distance of view must be at 30 cm.

(2). The test direction is base on about around 45° of vertical line.

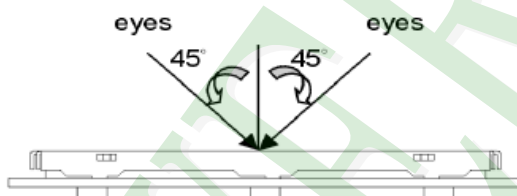

(3). Definition of area.

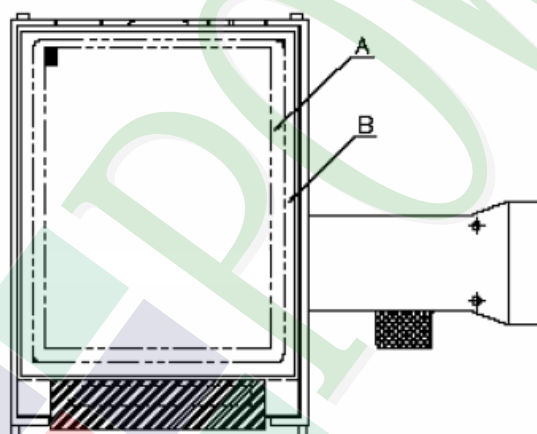

*A* area : viewing area

*B* area : Outside of viewing area

(4). Standard of inspection : (Unit : mm)

**◆ Specification For TFT-LCD Module Less Than 3.5" :**



(Ver.B01)

NO	Item	Criterion	Level												
01	Product condition	1. 1 The part number is inconsistent with work order of production.	Major												
		1. 2 Mixed product types.	Major												
		1. 3 Assembled in inverse direction.	Major												
02	Quantity	2. 1 The quantity is inconsistent with work order of production.	Major												
03	Outline dimension	3. 1 Product dimension and structure must conform to structure diagram.	Major												
04	Electrical Testing	4. 1 Missing line character and icon.	Major												
		4. 2 No function or no display.	Major												
		4. 3 Display malfunction.	Major												
		4. 4 LCD viewing angle defect.	Major												
		4. 5 Current consumption exceeds product specifications.	Major												
05	<div>Dot defect</div> <div>(Bright dot 、 Dark dot)</div> <div>On -display</div>	<table><thead><tr><th colspan="2">Item</th><th>Acceptance (Q'ty)</th></tr></thead><tbody><tr><td rowspan="4">Dot Defect</td><td>Bright Dot</td><td>≤ 2</td></tr><tr><td>Dark Dot</td><td>≤ 3</td></tr><tr><td>Joint Dot</td><td>≤ 2</td></tr><tr><td>Total</td><td>≤ 3</td></tr></tbody></table> <div>5. 1 Inspection pattern : full white , full black , Red , Green and blue screens.</div> <div>5. 2 It is defined as dot defect if defect area &gt;1/2 dot.</div> <div>5. 3 The distance between two dot defect ≥5 mm.</div>	Item		Acceptance (Q'ty)	Dot Defect	Bright Dot	≤ 2	Dark Dot	≤ 3	Joint Dot	≤ 2	Total	≤ 3	Minor
Item		Acceptance (Q'ty)													
Dot Defect	Bright Dot	≤ 2													
	Dark Dot	≤ 3													
	Joint Dot	≤ 2													
	Total	≤ 3													



◆ Specification For TFT-LCD Module Less Than 3.5" :


(Ver.B01)

NO	Item	Criterion	Level																																						
06	<p>Black or white dot、scratch、contamination</p> <p>Round type</p>  <p><math>\Phi=(x+y) / 2</math></p> <p>Line type</p> 	<p>6. 1 Round type ( Non-display or display ) :</p> <table><tr><th rowspan="2">Dimension (diameter : <math>\Phi</math>)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td><math>\Phi \leq 0.15</math></td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td><math>0.15 &lt; \Phi \leq 0.20</math></td><td>2</td></tr><tr><td><math>0.20 &lt; \Phi \leq 0.30</math></td><td>2</td></tr><tr><td><math>\Phi &gt; 0.30</math></td><td>0</td></tr><tr><td>Total</td><td>3</td><td></td></tr></table> <p>6. 2 Line type( Non-display or display ) :</p> <table><tr><th colspan="2">Dimension</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>Length (L)</th><th>Width (W)</th><th>A area</th><th>B area</th></tr><tr><td>---</td><td><math>W \leq 0.03</math></td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td><math>L \leq 5.0</math></td><td><math>0.03 &lt; W \leq 0.05</math></td><td>3</td></tr><tr><td>---</td><td><math>W &gt; 0.05</math></td><td>As round type</td></tr><tr><td colspan="2">Total</td><td>3</td></tr></table>	Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.15$	Ignore	Ignore	$0.15 < \Phi \leq 0.20$	2	$0.20 < \Phi \leq 0.30$	2	$\Phi > 0.30$	0	Total	3		Dimension		Acceptance (Q'ty)		Length (L)	Width (W)	A area	B area	---	$W \leq 0.03$	Ignore	Ignore	$L \leq 5.0$	$0.03 < W \leq 0.05$	3	---	$W > 0.05$	As round type	Total		3	Minor
Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)																																								
	A area	B area																																							
$\Phi \leq 0.15$	Ignore	Ignore																																							
$0.15 < \Phi \leq 0.20$	2																																								
$0.20 < \Phi \leq 0.30$	2																																								
$\Phi > 0.30$	0																																								
Total	3																																								
Dimension		Acceptance (Q'ty)																																							
Length (L)	Width (W)	A area	B area																																						
---	$W \leq 0.03$	Ignore	Ignore																																						
$L \leq 5.0$	$0.03 < W \leq 0.05$	3																																							
---	$W > 0.05$	As round type																																							
Total		3																																							
07	<p>Polarizer Bubble</p>	<table><tr><th rowspan="2">Dimension (diameter : <math>\Phi</math>)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td><math>\Phi \leq 0.20</math></td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td><math>0.20 &lt; \Phi \leq 0.50</math></td><td>3</td></tr><tr><td><math>\Phi &gt; 0.50</math></td><td>0</td></tr><tr><td>Total</td><td>3</td></tr></table>	Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.20$	Ignore	Ignore	$0.20 < \Phi \leq 0.50$	3	$\Phi > 0.50$	0	Total	3	Minor																								
Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)																																								
	A area	B area																																							
$\Phi \leq 0.20$	Ignore	Ignore																																							
$0.20 < \Phi \leq 0.50$	3																																								
$\Phi > 0.50$	0																																								
Total	3																																								





◆Specification For TFT-LCD Module Less Than 3.5" :

(Ver.B01)

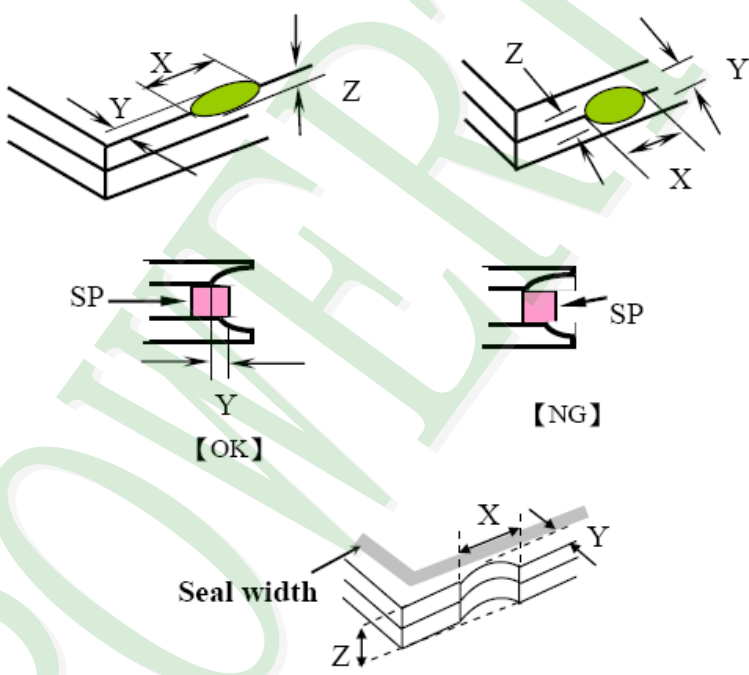NO	Item	Criterion	Level						
08	The crack of glass	<p><b>Symbols :</b></p> <p><b>X :</b> The length of crack <b>Z :</b> The thickness of crack <b>t :</b> The thickness of glass</p> <p><b>Y :</b> The width of crack. <b>W :</b> terminal length <b>a :</b> LCD side length</p> <hr/> <p>8.1 General glass chip :</p> <p>8.1.1 Chip on panel surface and crack between panels:</p> <div></div> <p>【OK】      【NG】</p>	Minor						
		<table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td><math>\leq a</math></td><td>Crack can't enter viewing area</td><td><math>\leq 1/2 t</math></td></tr><tr><td><math>\leq a</math></td><td>Crack can't exceed the half of SP width.</td><td><math>1/2 t &lt; Z \leq 2 t</math></td></tr></table>		X	Y	Z	$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$
X	Y	Z							
$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$							
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$							



◆ Specification For TFT-LCD Module Less Than 3.5" :

(Ver.B01)

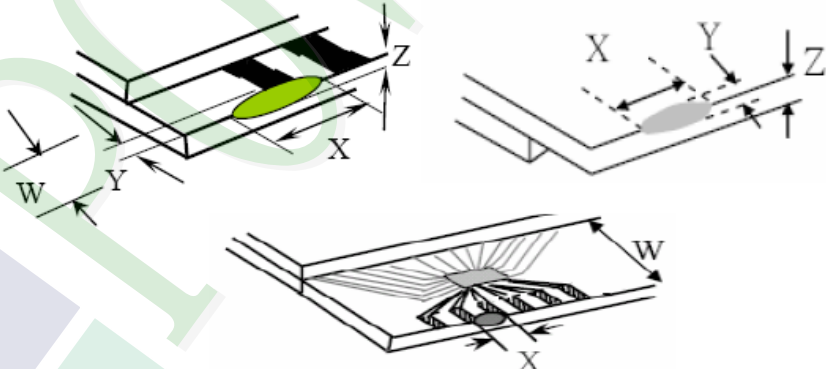NO	Item	Criterion	Level											
08	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p>	Minor											
		<p>8.1.2 Corner crack :</p> 												
		<table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td><math>\leq 1/5 a</math></td><td>Crack can't enter viewing area</td><td><math>Z \leq 1/2 t</math></td></tr><tr><td><math>\leq 1/5 a</math></td><td>Crack can't exceed the half of SP width.</td><td><math>1/2 t &lt; Z \leq 2 t</math></td></tr></table>		X	Y	Z	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$		
X	Y	Z												
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$												
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$												
		<p>8.2 Protrusion over terminal :</p> <p>8.2.1 Chip on electrode pad :</p> 												
		<table><tr><th></th><th>X</th><th>Y</th><th>Z</th></tr><tr><td>Front</td><td><math>\leq a</math></td><td><math>\leq 1/2 W</math></td><td><math>\leq t</math></td></tr><tr><td>Back</td><td><math>\leq a</math></td><td><math>\leq W</math></td><td><math>\leq 1/2 t</math></td></tr></table>		X	Y	Z	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	$\leq a$	$\leq W$	$\leq 1/2 t$
	X	Y	Z											
Front	$\leq a$	$\leq 1/2 W$	$\leq t$											
Back	$\leq a$	$\leq W$	$\leq 1/2 t$											

◆Specification For TFT-LCD Module Less Than 3.5" :

(Ver.B01)

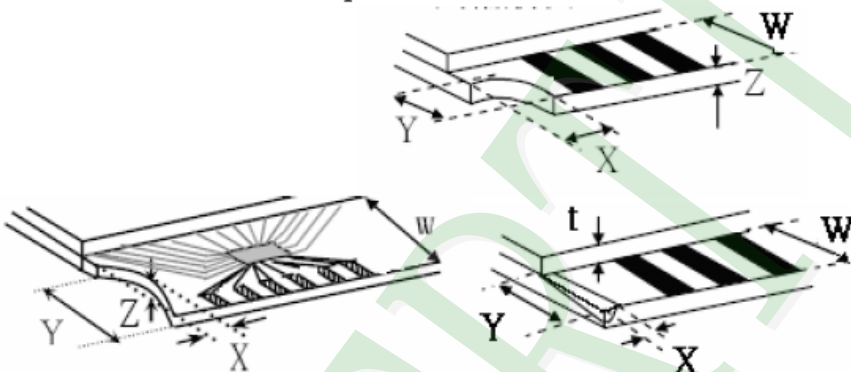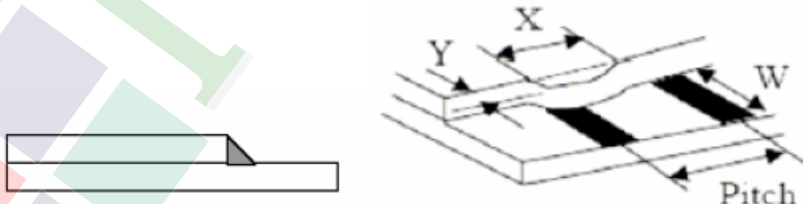NO	Item	Criterion	Level												
08	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p> <p>8.2.2 Non-conductive portion :</p>  <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td><math>\leq 1/3 a</math></td><td><math>\leq W</math></td><td><math>\leq t</math></td></tr></table> <p>⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>8.2.3 Glass remain :</p>  <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td><math>\leq a</math></td><td><math>\leq 1/3 W</math></td><td><math>\leq t</math></td></tr></table>	X	Y	Z	$\leq 1/3 a$	$\leq W$	$\leq t$	X	Y	Z	$\leq a$	$\leq 1/3 W$	$\leq t$	Minor
		X	Y	Z											
$\leq 1/3 a$	$\leq W$	$\leq t$													
X	Y	Z													
$\leq a$	$\leq 1/3 W$	$\leq t$													

**◆Specification For TFT-LCD Module Less Than 3.5" :**

(Ver.B01)

NO	Item	Criterion	Level
09	Backlight elements	9.1 Backlight can't work normally.	Major
		9.2 Backlight doesn't light or color is wrong.	Major
		9.3 Illumination source flickers when lit.	Major
10	General appearance	10.1 Pin type 、 quantity 、 dimension must match type in structure diagram.	Major
		10.2 No short circuits in components on PCB or FPC .	Major
		10.3 Parts on PCB or FPC must be the same as on the production characteristic chart .There should be no wrong parts , missing parts or excess parts.	Major
		10.4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10.5 The folding and peeled off in polarizer are not acceptable.	Minor
		10.6 The PCB or FPC between B/L assembled distance(PCB or FPC ) is $\leq 1.5$ mm.	Minor

## 4. RELIABILITY TEST

### 4.1 Reliability Test Condition

(Ver.B01)

NO.	TEST ITEM	TEST CONDITION	
1	High Temperature Storage Test	Keep in +80℃ ±2℃ 96 hrs Surrounding temperature, then storage at normal condition 4hrs.	
2	Low Temperature Storage Test	Keep in -30℃ ±2℃ 96 hrs Surrounding temperature, then storage at normal condition 4hrs.	
3	High Temperature / High Humidity Storage Test	Keep in +60 ℃ / 90% R.H duration for 96 hrs Surrounding temperature, then storage at normal condition 4hrs. (Excluding the polarizer)	
4	Temperature Cycling Storage Test	<div><div><div>-30℃ → +25℃ → +80℃ → +25℃</div><div>(30mins) (5mins) (30mins) (5mins)</div><div>← 10 Cycle →</div></div> Surrounding temperature, then storage at normal condition 4hrs.</div>	
5	ESD Test	Air Discharge: Apply 2 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/-
		1. Temperature ambience : 15℃ ~ 35℃ 2. Humidity relative : 30% ~ 60% 3. Energy Storage Capacitance(Cs+Cd) : 150pF±10% 4. Discharge Resistance(Rd) : 330 Ω±10% 5. Discharge, mode of operation : Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : ±5%)	
6	Vibration Test (Packaged)	1. Sine wave 10~55 Hz frequency (1 min/sweep) 2. The amplitude of vibration :1.5 mm 3. Each direction (X、Y、Z) duration for 2 Hrs	
7	Drop Test (Packaged)		
		Packing Weight (Kg)	Drop Height (cm)
		0 ~ 45.4	122
		45.4 ~ 90.8	76
		90.8 ~ 454	61
Over 454	46		
		Drop Direction :※1 corner / 3 edges / 6 sides each 1time	

## 5. PRECAUTION RELATING PRODUCT HANDLING

### 5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### 5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully, do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is  $320 \pm 10^{\circ}\text{C}$  and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM

### 5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

### 5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period  
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility  
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.



